– Quick quotation
– Easy to order
– Competitive delivery

Even more possibilities thanks to tailored design!

If you do not find what you need in our comprehensive standard programme, choose the tool shape you require and we will tailor it for you to *your* dimensions.
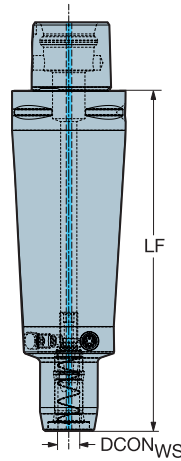
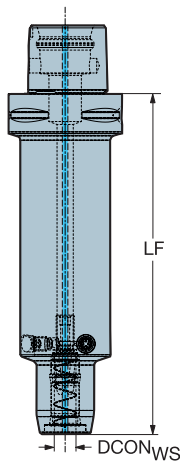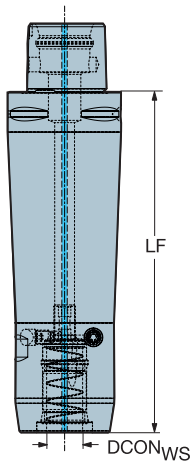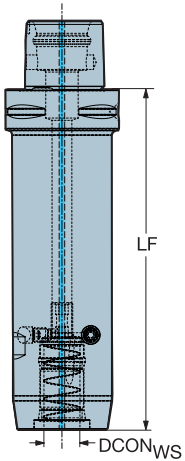# CoroChuck® 930

Coupling type tool side

A.

B.

Maximum LF is 3 times the coupling diameter. Exeption! Never longer than 230 mm (9.055 inch).

Coromant Capto® max 230 mm (9.055 inch)
HSK, 7/24, Taper, BIG-PLUS max 189 mm (7.441 inch).

Design version

Cylindrical   Conical   Cylindrical   Conical

Can not always be offered due to coupling size

Options

Note: For specific details regarding the options, contact your Sandvik Coromant sales representative.

Coupling type machine side	Coromant Capto, HSK, 7/24, BIG-PLUS
Coupling size machine side	C3-C10, HSK-A 40, 50, 63, 80,100, HSK-F 80, 30-50 Taper
Coupling type tool side	HD or Slender
Coupling size tool side	12, 20, 25, 32 mm, 1, 1.25 inch
Design versions	Cylindrical or conical
Programming lengths	mm

Customer	**Customer No. (Coromant internal)**	**Date**
Street	**Telephone**	**Customer attention**
Post Code/City/State	**Customer denomination**	**Issuer**
Quantity		

State nearest standard catalogue code, see main catalogue or supplement catalogue

| 9 3 0 | - | - | - | - | **Your value/ Your choice** |

State only your options deviating from the above standard		
Quantity	1-150	
Coupling type machine side	Coromant Capto, HSK-A, HSK-F, ISO, MAS BT, CAT V, ISO BIG-PLUS, MAS BT BIG-PLUS, CAT V BIG-PLUS	
Coupling size machine side	C3-C10, HSK-A 40, 50, 63, 80, 100, HSK-F 80, 30-50 Taper	
Coupling type tool side	HD or Slender	
Coupling size tool side	12, 20, 25, 32 mm, 1, 1.25 inch	
Programming length LF	_____ mm	
Design versions	Cylindrical or conical	

SANDVIK Coromant

The value/choice must be given

If no value/choice is specified, it will be recommended by the system